Dodge/Chrysler/Plymouth

Radio Replacement Document #: 327017

1981

thru 1993





Before You Begin

Remove & Install

Wire **New Radio**

Mount **New Radio**

Publication, Duplication, or Retransmission Of This Document Not Expressly Authorized In Writing By The Install Doctor Is Prohibited. Protected By U.S. Copyright Laws. © 1997,1998,1999,2000.

Factory Radio



New Radio

and dash installation kit



Other Documents Available For This Vehicle:

no documents available at this time

Adobe Acrobat Reader Printing Tips:

- 1) Select "FILE" then "PRINT" and select your printer.
- 2) In the print options box do the following:
 - A) Locate check box "Shrink to Fit". Place check in box.
 - B) Locate box "Print Quality". Select highest print dpi allowed by printer.
 - C) If print quality listed is not as high as that printers normal quality, press the "SETUP.." button. In the next screen, press the "PROPERTIES" button and set the printers print quality to the highest print dpi allowed.

Document Revision History

01/2000 Document Creation

Dodge/Chrysler/Plymouth

Radio Replacement Document #: 327017

1981

thru 1993



Click on a link tab to jump to that page

Cover Page

Before You Begin Remove & Install

Wire **New Radio**

Mount New Radio

Publication, Duplication, or Retransmission Of This Document Not Expressly Authorized In Writing By The Install Doctor Is Prohibited. Protected By U.S. Copyright Laws. © 1997,1998,1999,2000.

Overview Of This Radio Install

Step	What Section To Go To
Remove old radio from dash	Remove & Install
Wire the new radio	Wire New Radio
Mount the new radio	Mount New Radio
Finishing the installation	Remove & Install

Parts Needed For This Radio Install

Description	
Multi purpose Dodge/Chrysler	
Dodge/Chrysler/Plymouth	

Tools Needed To Complete This Install













Accessory tools needed to test and wire the new radio

PLUS: Wire ties or electrical tape: to neatly bundle and organize your wires for a professional appearance.

TOOL TIPS:

Small Battery: use a battery to test speaker wires. Touching the (+) positive and (-) negative baterry leads to a pair of speaker will cause the speaker to make a "Pop" sound indicating that pair of wires goes to that speaker. Voltage Meter: Always check +12 Volt power wires for voltage before making wire connections. These wires will fluctuate between 10 and 14 Volts. Solder Iron or Crimp Tool: make wire to wire connections using either a solder iron and electrical tape, OR plastic crimp terminals found at most hardware or auto parts stores.

Installation Difficulty Ratings

Easy. No advanced skills or specialty tools needed.

Basics. Simple tools required. Installs quickly.

Intermediate. Requires knowledge of tools, or disassembly of panels.

Advanced. Requires advanced tools, or extra time.

Difficult. Involves modifying or cutting of the installation area. Advanced tools and/or skills required. Best if performed by experienced installers.

Do It Yourselfers

Basics

Professional Installer

Basics

Support Information If You Need Help

Supplemental information if you need help

Document Title	Document #
Basic DC electronics for automotive applications	999001
Wire splicing: soldering vs. crimping	999004
Why use radio installation kits	999005
Mounting your radio to an installation kit	999007
Why use an OEM snap on wire harness	999008
Wiring your new radio using a wire harness	999009
Testing wires when installing a new radio	999013

All Information, Including Photos And Illustrations, In These Pages Is Believed To Be Correct And Reliable. The Information Contained In These Pages Is Given As General Information For The Installation Of Audio, Video, Security, Communications, And Other Accessory Products Into Mobile And/Or Vehicle Applications. The Install Doctor, Any Subsidiaries Or Divisions Thereof, Or Any Member Of These Companies Shall Not Be Held Liable For Any Damages And/Or Injuries Resulting From The Use Of Information Contained In These Pages. All Information Contained In These Pages Should Be Checked And Verified With Appropriate Test Equipment To Assure The Safety And Proper Operation Of Equipment Installed And The Vehicle Itself. Careful Attention Should Be Given To All Electronic/Electric Circuits. High Voltages And Currents Can Cause Bodily Injury, Skin Damage, And Even Death. Installs Are Taken At The Risk Of Each Installer, And/Or Individual.

Dodge/Chrysler/Plymouth

Radio Replacement

Document #: 327017

1981 thru 1993 Click on a link tab to jump to

that page

Cover Page

www.installdr.com

THE


Before You Begin Remove & Install

INSTALL DOCTOR

Wire New Radio Mount New Radio

Publication, Duplication, or Retransmission Of This Document Not Expressly Authorized In Writing By The Install Doctor Is Prohibited. Protected By U.S. Copyright Laws. © 1997,1998,1999,2000.

Remove Factory Radio









NOTE:

To remove the radio, the entire plastic dash panel must be removed. There are 5 phillips screws at the top of the dash, and 1 phillips screw located directly above the radio.

STEP 1:

Locate and remove (5) **phillips screws** securing the top of the dash panel above the instrument display.

STEP 2:

Locate and remove (1) **phillips screw** located directly above the radio.







STEP 3:

Once all screws have been removed, the plastic dash panel can be pulled away from the main body of the dash.

Tilt the steering wheel to its lowest position.

As seen in the photo above, grab the top corners of the dash panel and pull it forward. The bottom of the dash panel is snapped into place. Pull the dash and lift it above the steering wheel to remove it completely.

STEP 4:

The radio should now be visible. The radio is held in with either (2) two **phillips screws** or **10 mm bolts**. Remove both to free the radio. Unplug the antenna wire and (2) two dash wire harness connectors that snap into the rear of the radio. A metal braid ground strap secured to the back of the radio with (1) one **10 mm bolt** must be removed. The radio is now free to be completely removed from the dash.

Dodge/Chrysler/Plymouth

Radio Replacement
Document #: 327017

1981 thru 1993 Click on a link tab to jump to that page

Cover Page

www.installdr.com

THE

Before You Begin Remove & Install

INSTALL DOCTO

Wire New Radio Mount New Radio

Publication, Duplication, or Retransmission Of This Document Not Expressly Authorized In Writing By The Install Doctor Is Prohibited. Protected By U.S. Copyright Laws. © 1997,1998,1999,2000.

Wiring The New Radio

Move to: Wire New Radio Section

Is your radio or speakers marked or labeled with "INFINITY"?

What about the "Infinity" radio that was originally installed from the factory? What happens to it?

The "Infinity" radio in the vehicle will be removed, but you are going to use the rest of the "Infinity" components still in the vehicle. When you wire the radio, you are going to wire the radio just as you would for a standard radio that would be in this vehicle, but you are going to make one minor change to the new radios ground wire. The new radios ground wire is going to be connected to the plastic connector that had been plugged into the rear of the Infinity radio. This connector is a ground wire to an "Infinity" amplifier which is located away from the radio. When you connect the new radios ground wire to this ground wire for the "Infinity" amplifier, the "Infinity" amplifier will turn on and power the speakers inside the vehicle. In other words, connecting these 2 ground wires together allows you to "integrate" into the "Infinity" amplifier, just as the "Infinity" radio was.

The wiring steps are detailed in the "Wire New Radio" section

► Mounting The Radio To A Kit

Move to: Mounting New Radio Section

Completing The Radio Installation





Attach or plug in all wires into the new radio and plug in the antenna wire. Insert the new radio and installation kit into the dash opening. Secure the radio installation kit with the same (2) two **phillips screws or 10 mm bolts** that had originally secured the auto makers factory radio.



STEP 2:

The radio dash panel may now be attached back to the main dash. Replace the (5) five **phillips screws** at the top of the panel and (1) phillips screw located above the radio.

The installation is now complete.

All Information, Including Photos And Illustrations, In These Pages Is Believed To Be Correct And Reliable. The Information Contained In These Pages Is Given As General Information For The Installation Of Audio, Video, Security, Communications, And Other Accessory Products Into Mobile And/Or Vehicle Applications. The Install Doctor, Any Subsidiaries Or Divisions Thereof, Or Any Member Of These Companies Shall Not Be Held Liable For Any Damages And/Or Injuries Resulting From The Use Of Information Contained In These Pages. All Information Contained In These Pages Should Be Checked And Verified With Appropriate Test Equipment The State of Assure The Safety And Proper Operation Of Equipment Installed And The Vehicle Itself. Careful Attention Should Be Given To All Electronic/Electric Circuits. High Voltages And Currents Can Cause Bodily Injury, Skin Damage, And Even Death. Install Are Taken At The Risk Of Each Installer, And/Or Individual.

Dodge/Chrysler/Plymouth

Step By Step Wiring

Radio Replacement
Document #: 327017

1981 thru 1993




Click on a link tab to jump to that page

Cover Before Page You Begin Remove & Install

Wire New Radio Mount New Radio


Publication, Duplication, or Retransmission Of This Document Not Expressly Authorized In Writing By The Install Doctor Is Prohibited. Protected By U.S. Copyright Laws. © 1997,1998,1999,2000.



(Note: the radio shown is for display purposes and may not be similar in size or dimensions than the auto makers factory radio in your vehicle)


Supplemental information if you need help

Document Title	Document #
Testing wires when installing a new radio	999013
Why use an OEM snap on wire harness	999008
Wiring your new radio using a wire harness	999009
Wire splicing: soldering vs. crimping	999004

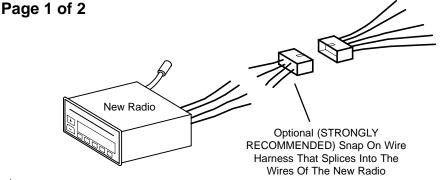

Wiring Instructions:

The power and speaker wires needed to connect the new radio are attached to the connector of the wire harness located inside the vehicles dash. The Install Doctor **STRONGLY** recommends using an optional snap on wire harness that is specifically designed to snap into the vehicles dash wire harness connector. This will keep you from cutting the vehicles wires. This optional snap on wire harness will have wires on the opposite side of the connector that will allow you to splice these wires to the new radios wires. The only other option is to cut off the vehicles dash wire harness connector and splice the new radios wires directly to these wires. The optional snap on wire harness takes all the guess work out of trying to figure out what each wire is in the vehicles dash wire harness. The optional snap on wire harness tell you what each wire is.

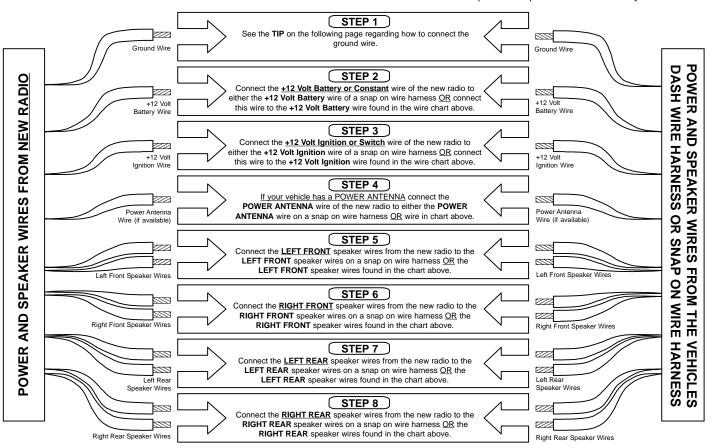

If your radio has the "INFINITY" system, you need to connect the new radios "power antenna wire" or "remote on" wire to PIN G, the power antenna wire, shown in the diagram on the following page.

Dodge/Chrysler/Plymouth

Radio Replacement

1981

Document #: 327017 thru 1993



Click on a link tab to jump to that page

Cover Page Before You Begin Remove Wire & Install New Radio


Mount New Radio

Publication, Duplication, or Retransmission Of This Document Not Expressly Authorized In Writing By The Install Doctor Is Prohibited. Protected By U.S. Copyright Laws. © 1997,1998,1999,2000.

Radio Wire & Color Code Information

Page 2 of 2

Factory in-dash wire harness (this vehicle has a 2 pc harness) that snaps into the factory radio



Pin	What It Is	Typical Dodge/Chrysler In Dash Wire Color	Typical New Radio Equivalent Wire Color	
Α	Right Rear Spkr (-)	Blue w/ White Stripe	Purple w/ Black Stripe	
В	Left Rear Spkr (-)	Brown w/ Yellow Stripe	Green w/ Black Stripe	
С	Right Front Spkr (+)	Purple	Gray	
D	Left Front Spkr (+)	Dark Green	White	
Е	Right Rear Spkr (+)	Blue w/ Orange Stripe	Purple	
F	Left Rear Spkr (+)	Brown w/ Blue Stripe	Green	
G	Power Antenna/Amp	White (use for Infinity Radio)	Blue	
Н	+12 Volt Battery Wire	Pink or Pink w/ White Stripe	Yellow	
1	+12 Volt Ignition Wire	Red w/ White Strip	Red	
J	Radio Dimmer Wire	Do Not Use	1	
K	Headlight Dimmer Wire	Do Not Use		
L	Right Front Spkr (-)	Blue w/ Red Stripe	Gray w/ Black Stripe	
М	Left Front Spkr (-)	Brown w/ Red Stripe	White w/ Black Stripe	
N	No Wire			
Metal Braid Or Plastic Connector Attached To Back Of Radio Is The Ground Wire				
			Black (see TIP)	

If your original radio had a braided strap bolted to the rear of the radio.




Crimp a **ring terminal** to the <u>new radios ground wire</u> and insert a bolt through both connectors to connect the ring terminal of the braided ground wire to the ring terminal attached to the new radios ground wire.



If your original radio had a plastic connector containing a single wire plugged into the rear of the radio.




Crimp a **male tab spade** to the <u>new radios</u> ground wire. Slide it into the female tab spade connector that had originally snapped into the rear of the factory radio.



If your original radio or speaker grills were labeled or marked with 'INFINITY'



Crimp a **male tab spade** to the <u>new radios</u> ground wire. Slide it into the female tab spade connector that had originally snapped into the rear of the factory radio to activate the 'Infinity' sound system.



If your radio has the "INFINITY" system, you need to connect the new radios "power antenna wire" or "remote on" wire to PIN G, the power antenna wire, shown in the diagram above.

Dodge/Chrysler/Plymouth

Radio Replacement Document #: 327017

1981 thru 1993



Click on a link tab to jump to

Cover **Before Page** You Begin Remove & Install

Wire **New Radio**

Mount **New Radio**

Publication, Duplication, or Retransmission Of This Document Not Expressly Authorized In Writing By The Install Doctor Is Prohibited. Protected By U.S. Copyright Laws. © 1997,1998,1999,2000.

Mounting A Radio To A Dash Kit

NOTE:


Before you begin: A word about the radio installation kit you are about to install. There are many manufacturers of radio installation kits for this vehicle. Each manufacturer produces slightly different variations of the same kit, and a


few make individual kits for specific vehicles. The pictured installation kit shown in the illustrations below is a standard kit used for many Dodge/Chrysler/Plymouth vehicles. Radio installation kits change with the model and years of production of the vehicle. When selecting a kit for this vehicle, make sure the kit you purchase states on the package the installation kit will work with your vehicle model and year. Some kits may require additional setup. Certain kits may be multi function kits designed to work with multiple vehicles and may require the installer to remove break away screw mounting tabs attached to the kit that are not required for your particular vehicle.

All information needed to complete the mounting of the new radio to the installation kit is included on this sheet. If you need additional help, please consult the following tech documents:

Document Title	Document #
Why use radio installation kits	999005
Mounting your radio to an installation kit	999007
Radio security	999010

Follow the instructions below for your type of radio

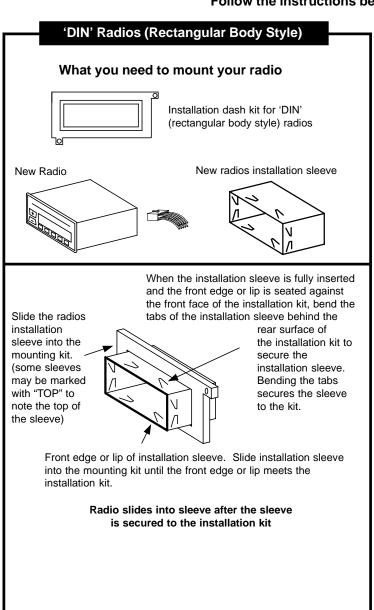

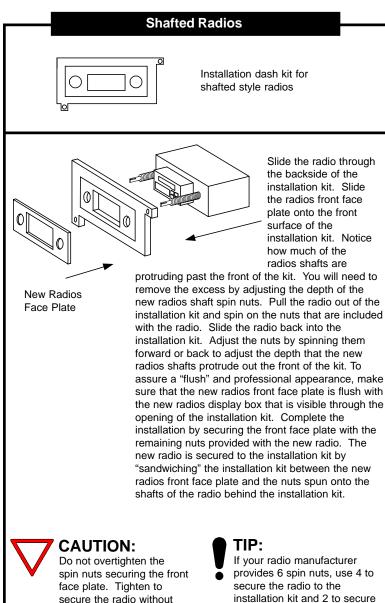

the front face plate.

All Information, Including Photos And Illustrations, In These Pages Is Believed To Be Correct And Reliable. The Information Contained In These Pages Is Given As General Information For The Installation Of Audio, Video, Security, Communications, And Other Accessory Products Into Mobile And/Or Vehicle Applications. The Install Doctor, Any Subsidiaries Or Divisions Thereof, Or Any Member Of These Companies Shall Not Be Held Liable For Any Damages And/Or Injuries Resulting From The Use of Information Contained In These Pages. All Information Contained In These Pages Should Be Checked And Verified With Appropriate Test Equipment To Assure The Safety And Proper Operation Of Equipment Installed And The Vehicle Itself. Careful Attention Should Be Given To All Electronic/Electric Circuits. High Voltages And Currents Can Cause Bodily Injury, Skin Damage, And Even Death. Installs Are Taken At The Risk Of Each Installer, And/Or Individual.

secure the radio without

cracking the plastic.