Grand Cherokee								
Radio Replacement Document #: 533013	1996 thru 1998	Click on a link tab to jump to that page	Cover Page	Before You Begin	Remove & Install	Wire New Radio	Mount New Radio	

Publication, Duplication, or Retransmission Of This Document Not Expressly Authorized In Writing By The Install Doctor Is Prohibited. Protected By U.S. Copyright Laws. © 1997,1998,1999,2000.

Factory Radio

D



Other Documents Available For This Vehicle:

No other documents available at this time.

Adobe Acrobat Reader Printing Tips:

1) Select "FILE" then "PRINT" and select your printer.

- 2) In the print options box do the following:
 - A) Locate check box "Shrink to Fit". Place check in box.
 - B) Locate box "Print Quality". Select highest print dpi allowed by printer.
 - C) If print quality listed is not as high as that printers normal quality, press the "SETUP.." button. In the next screen, press the "PROPERTIES" button and set the printers print quality to the highest print dpi allowed.

Document Revision History

12/99 Document Creation



Jeep

Radio Replacement Document #: 533013

1996 thru 1998

SW2 Click on a link tab to jump to



THE

INSTALL DOCTOR

Wire

New Radio

Mount

New Radio

You Begin Page that page

Publication, Duplication, or Retransmission Of This Document Not Expressly Authorized In Writing By The Install Doctor Is Prohibited. Protected By U.S. Copyright Laws. © 1997,1998,1999,2000.

Remove

& Install

Overview Of This Radio Install

Remove & Install
Remove & mstan
Wire New Radio
Mount New Radio
Remove & Install

Parts Needed For This Radio Install

Parts REQUIRED for the install	Description		
Dash installation kit	Multi purpose Dodge/Chrysler		
Wire harness adapter	2 pc Dodge/Chrysler/Plymouth		


Optional parts for this install

None

TOOL TIPS:

hardware or auto parts stores.

Tools Needed To Complete This Install



Hand tools needed to remove radio



Accessory tools needed to test and wire the new radio

PLUS: Wire ties or electrical tape: to neatly bundle and organize your wires for a professional appearance.

Installation Difficulty Ratings

Easy. No advanced skills or specialty tools needed. Basics. Simple tools required. Installs quickly.

Intermediate. Requires knowledge of tools, or disassembly of panels.

Advanced. Requires advanced tools, or extra time.

Difficult. Involves modifying or cutting of the installation area. Advanced tools and/or skills required. Best if performed by experienced installers.

Do It Yourselfers

Basics

Small Battery: use a battery to test speaker wires. Touching the (+) positive

making wire connections. These wires will fluctuate between 10 and 14 Volts.

Solder Iron or Crimp Tool: make wire to wire connections using either a

solder iron and electrical tape, OR plastic crimp terminals found at most

and (-) negative baterry leads to a pair of speaker will cause the speaker to

make a "Pop" sound indicating that pair of wires goes to that speaker. Voltage Meter: Always check +12 Volt power wires for voltage before

Professional Installer

Basics

Support Information If You Need Help

Supplemental information if you need help

Document Title	Document #
Basic DC electronics for automotive applications	999001
Wire splicing: soldering vs. crimping	999004
Why use radio installation kits	999005
Mounting your radio to an installation kit	999007
Why use an optional snap on wire harness	999008
Wiring your new radio using a wire harness	999009
Testing wires when installing a new radio	999013

All Information, Including Photos And Illustrations, In These Pages Is Believed To Be Correct And Reliable. The Information Contained In These Pages Is Given As General Information For The Installation Of Audio, Video, Security, Communications, And Other Accessory Products Into Mobile And/Or Vehicle Applications. The Install Doctor, Any Subsidiaries Or Divisions Thereof, Or Any Member Of These Companies Shall Not Be Held Liable For Any Damages And/Or Injuries Resulting From The Use Of Information Contained In These Pages. All Information Contained In These Pages. All Information Contained In These Pages Should Be Checked And Verified With Appropriate Test Equipment To Assure The Safety And Proper Operation Of Equipment Installed And The Vehicle Itself. Careful Attention Should Be Given To All Electronic/Electric Circuits. High Voltages And Currents Can Cause Bodily Injury, Skin Damage, And Even Death. Installs Are Taken At The Risk Of Each Installer, And/Or Individual.

Jeep

Radio Replacement Document #: 533013

1996 thru 1998

SW2 Click on a link tab to jump to that page



You Begin

THE

Page

Remove Wire & Install **New Radio**

Mount

New Radio

Remove Factory Radio





Publication, Duplication, or Retransmission Of This Document Not Expressly Authorized In Writing By The Install Doctor Is Prohibited. Protected By U.S. Copyright Laws. © 1997,1998,1999,2000.



Radio Removal Note:

To replace the radio in this vehicle, you must remove the plastic dash panel surrounding the radio and instrument display.

STEP 1:

Locate the plastic dash panel that surrounds the air conditioner controls. With your hands, firmly but gently pull this panel until it unsnaps from the main dash.

STEP 2:

Once the plastic panel has been unsnapped, locate and remove three (3) phillips screws which secure the lower part of the upper dash panel that surrounds the radio and instruments display.



STEP 3:

Move to the left of the steering wheel and unsnap the plastic dash panel which surrounds the headlight switch.

Once the plastic panel has been unsnapped, locate and remove two (2) phillips screws which secure the lower part of the upper dash panel that surrounds the radio and instruments display.

STEP 4:

All Information, Including Photos And Illustrations, In These Pages Is Believed To Be Correct And Reliable. The Information Contained In These Pages Is Given As General Information For The Installation Of Audio, Video, Security, Communications, And Other Accessory Products Into Mobile And/Or Vehicle Applications. The Install Doctor, Any Subsidiaries Or Divisions Thereof, Or Any Member Of These Companies Shall Not Be Held Liable For Any Damages And/Or Injuries Resulting From The Use Of Information Contained In These Pages. All Information Contained In These Pages Shall be Checked And Verified With Appropriate Test Equipment To Assume The Safety And Proper Operation Of Equipment Installed And The Vehicle Itself. Careful Attention Should Be Given To All Electronic/Electric Circuits. High Voltages And Currents Can Cause Bodily Injury, Skin Damage, And Even Death. Installs Are Taken At The Risk Of Each Installer, And/Or Individual.



Radio Replacement Document #: 533013





& Install

You Begin

Wire Mount New Radio New Radio

Publication, Duplication, or Retransmission Of This Document Not Expressly Authorized In Writing By The Install Doctor Is Prohibited. Protected By U.S. Copyright Laws. © 1997,1998,1999,2000.

SWZ.

Click on a link tab to jump to



STEP 5:



THE

Page



STEP 6:

Look UP under the dash which overhangs the radio and instrument display. Locate and remove five (5) phillips screws which secure the top of the dash panel which surrounds the radio and instrument display. All screws which secure the dash panel surrounding the radio/instrument display have been removed. Pull the dash panel until it separates from the dash. You may need to lower the steering wheel so that you have enough room to pull the panel away from the dash.



STEP 7:

The radio is secured to the dash with two (2) 10 mm bolts. Locate and remove one bolt at the top right corner of the radio and one bolt at the bottom left corner of the radio.

STEP 8:

Pull the radio out of the dash. Unplug the black cable plugged into the rear of the radio. Unplug 2 plastic connectors plugged into the rear of the radio. Unplug 1 small plastic connector attached to a single wire which is plugged into the rear of the radio.

All Information, Including Photos And Illustrations, In These Pages Is Believed To Be Correct And Reliable. The Information Contained In These Pages Is Given As General Information For The Installation Of Audio, Video, Security, Communications, And Other Accessory Products Into Mobile And/Or Vehicle Applications. The Install Doctor, Any Subsidiaries Or Divisions Thereof, Or Any Member Of These Companies Shall Not Be Held Liable For Any Damages And/Or Injuries Resulting From The Use Of Information Contained In These Pages. All Information Contained In These Pages Should Be Checked And Verified With Appropriate Test Equipment To Assure The Safety And Proper Operation Of Equipment Installed And The Vehicle Itself. Careful Attention Should Be Given To All Electronic/Electric Circuits. High Voltages And Currents Can Cause Bodily Injury, Skin Damage, And Even Death. Installs Are Taken At The Risk Of Each Installer, And/Or Individual.



Radio Replacement Document #: 533013

1996 hru 1998

Click on a link tab to jump to INSTALL DOCTOR www.installdr.com

Before

 cument #: 533013
 thru 1998
 tab to jump to that page
 Page
 You Begin
 & Install
 New Radio
 New Radio

 Publication, Duplication, or Retransmission Of This Document Not Expressly Authorized In Writing By The Install Doctor Is Prohibited. Protected By U.S. Copyright Laws. © 1997,1998,1999,2000.

THE

Cover

Wiring The New Radio

Move to: Wire New Radio Section

Is your radio or speakers marked or labeled with "INFINITY" ?

What about the "Infinity" radio that was originally installed from the factory? What happens to it?

The "Infinity" radio in the vehicle will be removed, but you are going to use the rest of the "Infinity" components still in the vehicle. When you wire the radio, you are going to wire the radio just as you would for a standard radio that would be in this vehicle, but you are going to make one minor change to the new radios ground wire. The new radios ground wire is going to be plugged into the plastic connector that had originally been plugged into the rear of the Infinity radio. This connector is a ground wire to an "Infinity" amplifier which is located away from the radio. When you plug the new radios ground wire into this ground wire for the "Infinity" amplifier, the "Infinity" amplifier will turn on and power the speakers inside the vehicle. In other words, connecting these 2 ground wires together allows you to "integrate" into the "Infinity" amplifier, just as the original "Infinity" radio had integrated into it.

The wiring steps are detailed in the "Wire New Radio" section


Mounting The Radio To A Kit

Remove

Wire

Mount

Move to: Mounting New Radio Section

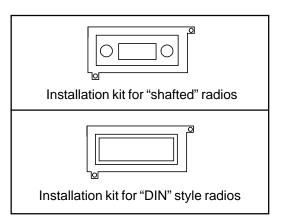

Completing The Radio Installation



STEP 1:

Attach or plug in all wires into the new radio and plug in the antenna wire. Insert the new radio and installation kit into the dash opening. Secure the radio with the same (2) two **10 mm bolts** that had originally secured the auto makers factory radio.



STEP 2:

Reattach the plastic dash panel(s) by snapping them back onto the body of the main dash.

The installation is now complete.


All Information, Including Photos And Illustrations, In These Pages Is Believed To Be Correct And Reliable. The Information Contained In These Pages Is Given As General Information For The Installation Of Audio, Video, Security, Communications, And Other Accessory Products Into Mobile And/Or Vehicle Applications. The Install Doctor, Any Subsidiaries Or Divisions Thereof, Or Any Member Of These Companies Shall Not Be Held Liable For Any Damages And/Or Injuries Resulting From The Use Of Information Contained In These Pages. All Information Contained In These Pages Should Be Checked And Verified Test Equipment To Assure The Safety And Proper Operation Of Equipment Installed And The Vehicle Itself. Careful Attention Should Be Given To All Electronic/Electric Circuits. High Voltages And Currents Can Cause Bodily Injury, Skin Damage, And Even Death. Installs Are Taken At The Risk Of Each Installer, And/Or Individual.

INSTALL DOCTOR www.installdr.com Jeep SW2 1996 **Radio Replacement** Cover Before Wire Click on a link Remove Mount tab to jump to Page You Begin & Install New Radio New Radio thru 1998 Document #: 533013 that page Publication, Duplication, or Retransmission Of This Document Not Expressly Authorized In Writing By The Install Doctor Is Prohibited. Protected By U.S. Copyright Laws. © 1997,1998,1999,2000.

THE

Step By Step Wiring


Page 1 of 2

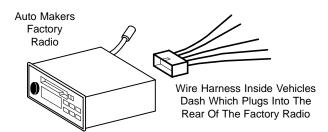

(Note: the radio shown is for display purposes and may not be similar in size or dimensions than the auto makers factory radio in your vehicle)


Supplemental information if you need help

Document Title	Document #
Testing wires when installing a new radio	999013
Why use an OEM snap on wire harness	999008
Wiring your new radio using a wire harness	999009
Wire splicing: soldering vs. crimping	999004

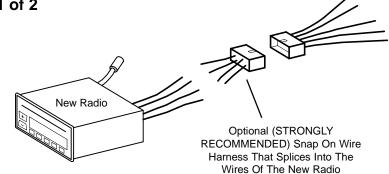

Wiring Instructions:

The power and speaker wires needed to connect the new radio are attached to the connector of the wire harness located inside the vehicles dash. The Install Doctor STRONGLY recommends using an optional snap on wire harness that is specifically designed to snap into the vehicles dash wire harness connector. This will keep you from cutting the vehicles wires. This optional snap on wire harness will have wires on the opposite side of the connector that will allow you to splice these wires to the new radios wires. The only other option is to cut off the vehicles dash wire harness connector and splice the new radios wires directly to these wires. The optional snap on wire harness takes all the guess work out of trying to figure out what each wire is in the vehicles dash wire harness. The optional snap on wire harness shows you what each wire is.

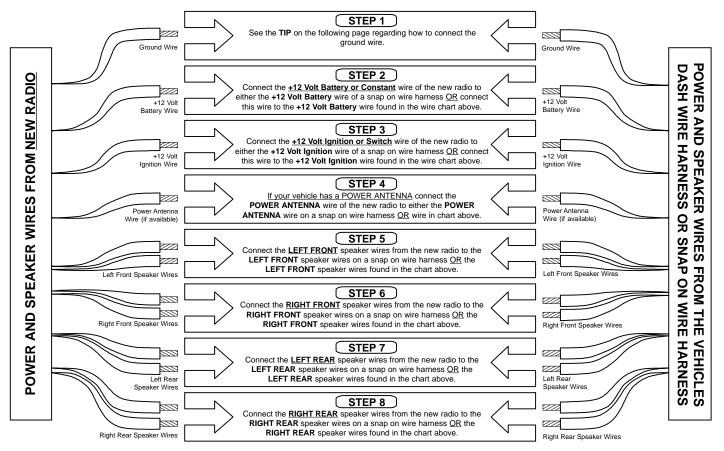

All Information, Including Photos And Illustrations, In These Pages Is Believed To Be Correct And Reliable. The Information Contained In These Pages Is Given As General Information For The Installation Of Audio, Video, Security, Communications, And Other Accessory Products Into Mobile And/Or Vehicle Applications. The Install Doctor, Any Subsidiaries Or Divisions Thereof, Or Any Member Of These Companies Shall Not Be Held Liable For Any Damages And/Or Injuries Resulting From The Use Of Information Contained In These Pages. All Information Contained In These Pages Shall Be Checked And Verified With Appropriate Test Equipment To Assure The Safety And Proper Operation Of Equipment Installed And The Vehicle Itself. Careful Attention Should Be Given To All Electronic/Electric Circuits. High Voltages And Currents Can Cause Bodily Injury, Skin Damage, And Even Death. Installs Are Taken At The Risk Of Each Installer, And/Or Individual.






Publication, Duplication, or Retransmission Of This Document Not Expressly Authorized In Writing By The Install Doctor Is Prohibited. Protected By U.S. Copyright Laws. © 1997,1998,1999,2000.

Radio Wire & Color Code Information

Page 2 of 2

Factory in-dash wire harness (this vehicle has a 2 pc harness) that snaps into the factory radio

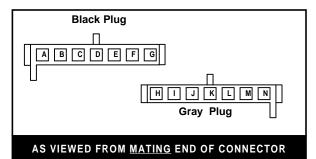


Pin	What It Is	Typical Dodge/Chrysler In Dash Wire Color	Typical New Radio Equivalent Wire Color		
А	Right Rear Spkr (-)	Blue w/ White Stripe	Purple w/ Black Stripe		
B	Left Rear Spkr (-)	Brown w/ Yellow Stripe	Green w/ Black Stripe		
С	Right Front Spkr (+)	Purple	Gray		
D	Left Front Spkr (+)	Dark Green	White		
Е	Right Rear Spkr (+)	Blue w/ Orange Stripe	Purple		
F	Left Rear Spkr (+)	Brown w/ Blue Stripe	Green		
G	Power Antenna/Amp	White (use for Infinity Radio)	Blue		
Н	+12 Volt Battery Wire	Pink or Pink w/ White Stripe	Yellow		
1	+12 Volt Ignition Wire	Red w/ White Strip	Red		
J	Radio Dimmer Wire	Do Not Use	•		
K	Headlight Dimmer Wire	Do Not Use			
L	Right Front Spkr (-)	Blue w/ Red Stripe	Gray w/ Black Stripe		
М	Left Front Spkr (-)	Brown w/ Red Stripe	White w/ Black Stripe		
Ν	No Wire				
Meta	Metal Braid Or Plastic Connector Attached To Back Of Radio Is The Ground Wire				
			Black (see TIP)		

If your original radio had a plastic connector containing a single wire plugged into the rear of the radio.




Crimp a male tab spade to the new radios ground wire. Slide it into the female tab spade connector that had originally snapped into the rear of the factory radio.



If your original radio or speaker grills were labeled or marked with 'INFINITY'



Crimp a male tab spade to the new radios ground wire. Slide it into the female tab spade connector that had originally snapped into the rear of the factory radio to activate the 'Infinity' sound system.



Jeep

Radio Replacement Document #: 533013



M. that page

www.installdr.com Cover Click on a link tab to jump to Page

THE

All information needed to complete the mounting of the new radio to the installation kit is included on this sheet. If you need additional help, please consult the following tech documents:

Wire

New Radio

Mount

New Radio

Remove

& Install

INSTALL DOCTOR

Before


You Begin

NOTE:

Before you begin: A word about the radio installation kit you are about to install. There are many manufacturers of radio installation kits for this vehicle. Each manufacturer produces slightly different variations of the same kit, and a few make individual kits for specific vehicles. The pictured installation kit shown in the illustrations below is a standard kit used for many Dodge/Chrysler/Plymouth vehicles. Radio installation kits change with the model and years of production of the vehicle. When selecting a kit for this vehicle, make sure the kit you purchase states on the package the installation kit will work with your vehicle model and year. Some kits may require additional setup. Certain kits may be multi function kits designed to work with multiple vehicles and may require the installer to remove break away screw mounting tabs attached to the kit that are not required for your particular vehicle.

Document Title Document # Why use radio installation kits 999005 Mounting your radio to an installation kit 999007 999010 Radio security

Follow the instructions below for your type of radio

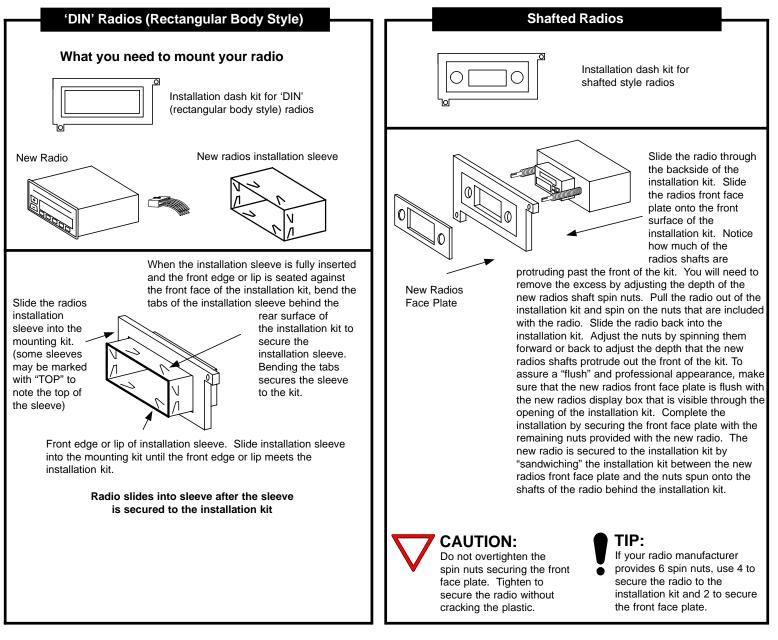

All Information, Including Photos And Illustrations, In These Pages Is Believed To Be Correct And Reliable. The Information Contained In These Pages Is Given As General Information For The Installation Of Audio, Video, Security, Communications, And Other Accessory Products Into Mobile And/Or Vehicle Applications. The Install Doctor, Any Subsidiaries Or Divisions Thereof, Or Any Member Of These Companies Shall Not Be Held Liable For Any Damages And/Or Injuries Resulting From The Use Of Information Contained In These Pages. All Information Contained In These Pages Shall Be Checked And Verified With Appropriate Test Equipment To Assure The Safety And Proper Operation Of Equipment Installed And The Vehicle Itself. Careful Attention Should Be Given To All Electronic/Electric Circuits. High Voltages And Currents Can Cause Bodily Injury, Skin Damage, And Even Death. Installs Are Taken At The Risk Of Each Installer, And/Or Individual.