

Radio Replacement  
Document #: 647041

1995  
thru 1998

Click on a link  
tab to jump to  
that page

Cover  
Page

Before  
You Begin

Remove  
& Install

Wire  
New Radio

Mount  
New Radio

Publication, Duplication, or Retransmission Of This Document Not Expressly Authorized In Writing By The Install Doctor Is Prohibited. Protected By U.S. Copyright Laws. © 1997,1998,1999,2000.

## Factory Radio



## Other Documents Available For This Vehicle:

No documents available at this time

## New Radio Installed



## Adobe Acrobat Reader Printing Tips:

- 1) Select "**FILE**" then "**PRINT**" and select your printer.
- 2) In the print options box do the following:
  - A) Locate check box "**Shrink to Fit**". Place check in box.
  - B) Locate box "**Print Quality**". Select highest print dpi allowed by printer.
  - C) If print quality listed is not as high as that printers normal quality, press the "**SETUP..**" button. In the next screen, press the "**PROPERTIES**" button and set the printers print quality to the highest print dpi allowed.

## Document Revision History

02/2000 Document Creation

Click on a link  
tab to jump to  
that page

Cover  
Page

Before  
You Begin

Remove  
& Install

Wire  
New Radio

Mount  
New Radio

Publication, Duplication, or Retransmission Of This Document Not Expressly Authorized In Writing By The Install Doctor Is Prohibited. Protected By U.S. Copyright Laws. © 1997,1998,1999,2000.

### Overview Of This Radio Install

Step	What Section To Go To
Remove old radio from dash	Remove & Install
Wire the new radio	Wire New Radio
Mount the new radio	Mount New Radio
Finishing the installation	Remove & Install


### Parts Needed For This Radio Install

Parts REQUIRED for the install	Description
Snap on wire harness adapter	Nissan 95 and newer harness
Antenna adapter	Nissan 'Diversity' adapter


#### Optional parts for this install

None



### Tools Needed To Complete This Install



Hand tools needed  
to remove radio



Accessory tools needed to test and  
wire the new radio



#### TOOL TIPS:

**Small Battery:** use a battery to test speaker wires. Touching the (+) positive and (-) negative battery leads to a pair of speaker will cause the speaker to make a "Pop" sound indicating that pair of wires goes to that speaker.  
**Voltage Meter:** Always check +12 Volt power wires for voltage before making wire connections. These wires will fluctuate between 10 and 14 Volts.  
**Solder Iron or Crimp Tool:** make wire to wire connections using either a solder iron and electrical tape, OR plastic crimp terminals found at most hardware or auto parts stores.

**PLUS: Wire ties or electrical tape:** to neatly bundle and organize your wires for a professional appearance.

### Installation Difficulty Ratings

- Easy.** No advanced skills or specialty tools needed.
- Basics.** Simple tools required. Installs quickly.
- Intermediate.** Requires knowledge of tools, or disassembly of panels.
- Advanced.** Requires advanced tools, or extra time.
- Difficult.** Involves modifying or cutting of the installation area. Advanced tools and/or skills required. Best if performed by experienced installers.

#### Do It Yourselfers

Intermediate

#### Professional Installer


Basics

### Support Information If You Need Help

Supplemental information if you need help

Document Title	Document #
Basic DC electronics for automotive applications	999001
Wire splicing: soldering vs. crimping	999004
Why use radio installation kits	999005
Mounting your radio to an installation kit	999007
Why use an optional snap on wire harness	999008
Wiring your new radio using a wire harness	999009
Testing wires when installing a new radio	999013

## ► Remove Factory Radio

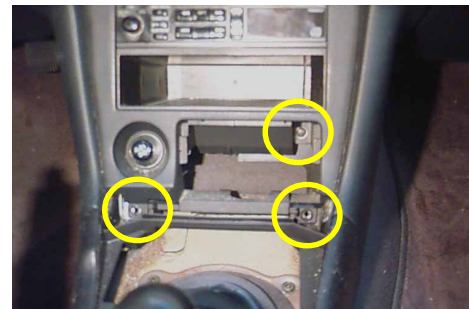

**NOTE:**

The radio is secured to the entire radio-pocket assembly as one unit, including the plastic panel surrounding the radio. **DO NOT** pull the plastic panel away from the radio or you will break the plastic panel. The radio and plastic panel must be removed together, as one unit.

**STEP 1:**

With your hands, unsnap the plastic dash panel that surrounds the gear shift.

For automatics: this panel will pull completely away.

For stick shifts: the protective leather boot will keep the panel from pulling completely away. Just move twist it out of the way.

**STEP 2:**

At the very bottom of the plastic dash panel that surrounds the radio (below the ashtray and cigarette lighter) are (2) phillips screws hidden by the plastic panel that surrounds the gear shift. Locate and remove both screws. Pull out the ashtray. Locate and remove (1) phillips screw hidden behind the ashtray.



**STEP 3:**

The top of the plastic dash panel surrounding the radio has a snap bracket that is hidden underneath the air conditioner vent panel located above the radio. Before the radio assembly can be removed, this air vent panel assembly must be removed. Grab the bottom of the air vent panel and pull firmly. The air vent panel will unsnap and pull away. Unplug the wire harness connectors plugged into the rear of the air vent panel assembly.



**STEP 4:**

Hidden behind the air vent panel assembly just removed are (2) phillips screws that secure the top of radio assembly into the dash. Remove both screws.



**STEP 5:**

All screws that secure the radio assembly have been removed. **REMEMBER**, the radio is attached as one unit to the plastic panel that surrounds the radio.

Grab the radio/panel assembly and pull it out of the dash. Unplug the connectors attached to the rear of the cigarette lighter.



**STEP 6:**


Unplug the black cable plugged into the rear of the radio. Unplug (2) white plastic wire harness connectors snapped into the rear of the radio. Pull the entire radio assembly out of the dash and move to the following pages to see how to remove the original radio and mount the new radio.

## ► Wiring The New Radio

Move to: [Wire New Radio](#) Section

### Required Nissan Antenna Adapter

Nissan vehicles use an odd antenna connector designed specifically for Nissan radios only. This antenna connector will not fit into a new radio. You will need a **Nissan “diversity” antenna adapter** which converts the odd antenna connector over to a standard connector that will fit into your new radio.

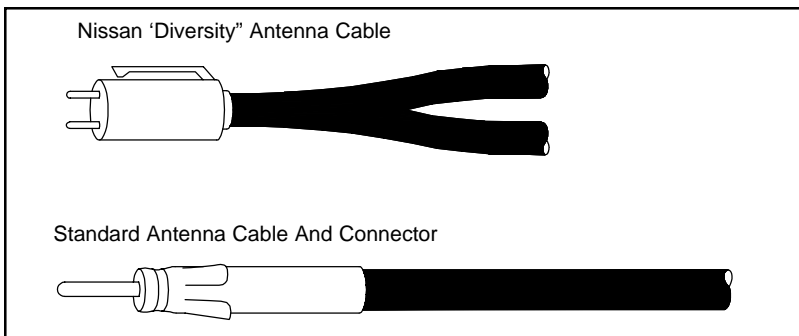

## ► Mounting The Radio

Move to: [Mounting New Radio](#) Section

The Install Doctor **STRONGLY** recommends purchasing a 'DIN' radio for this vehicle. 'DIN' radios are a direct replacement for the radio in this vehicle. More information is available in the **“Mount New Radio”** section.

### Double 'DIN' Style Radios Instead Of A Radio With A Pocket Below The Radio:

The Install Doctor **STRONGLY recommends** that you convert your radio assembly over to the use of a pocket below the new radio. You can purchase an original pocket from a Nissan dealership or you can purchase a radio installation kit pocket from a local installation shop which is designed as an aftermarket equivalent to the Nissan pocket.

Using a pocket eliminates the need to use a radio installation kit to mount a new radio into this vehicle and keeps the appearance that the new radio was installed by the automaker.



Publication, Duplication, or Retransmission Of This Document Not Expressly Authorized In Writing By The Install Doctor Is Prohibited. Protected By U.S. Copyright Laws. © 1997,1998,1999,2000.

## ▶ Completing The Radio Installation

This information is shown in more detail  
in the “Mount New Radio” section




**STEP 1:**



**STEP 2:**

The automakers original radio is secured to the radio assembly by metal brackets on the side of the radio which also secures the pocket below the radio. The radio is secured to the metal brackets with (2) phillips screws on each side of the radio. Remove both screws. Before you can pull the radio out of the brackets, you will probably have to remove the screws that secure the pocket to the brackets. This should allow the radio to remove from the bracket much easier.

Insert and attach the new radio into the brackets. Depending upon the radio, you may be able to use the same screws to secure the new radio to the metal brackets. If the these screws will not work, the new radio should be packaged with screws to allow you to mount the radio to brackets.



**STEP 3:**

Once the new radio has been attached to the brackets and pocket, you can insert the radio/pocket assembly back into the dash.

Plug in the antenna cable into the rear of the new radio. Make sure all wire connections for the new radio have been completed and plug in any of the new radios connectors into the rear of the radio.

Insert the radio/pocket assembly back into the dash and secure the assembly with the (2) screws at the top of the radio, and the (3) screws at the bottom of the assembly.



**STEP 4:**



Reattach the air vent assembly panel above the radio. Remember to plug in the connectors at the bottom of the panel.

**The installation is now complete.**



Publication, Duplication, or Retransmission Of This Document Not Expressly Authorized In Writing By The Install Doctor Is Prohibited. Protected By U.S. Copyright Laws. © 1997,1998,1999,2000.

► **Step By Step Wiring**

Auto Makers  
Factory  
Radio



Wire Harness Inside Vehicles  
Dash Which Plugs Into The  
Rear Of The Factory Radio

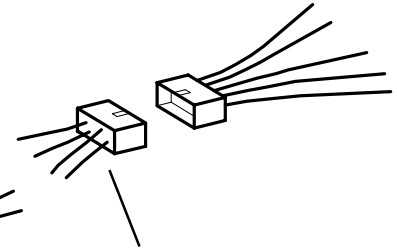

Optional Snap On Wire Harness  
(Strongly Recommended) That  
Splices Into The Wires Of The  
New Radio


(Note: the radio shown is for display purposes and may not be similar in size or dimensions than the auto makers factory radio in your vehicle)

Supplemental information if you need help

Document Title	Document #
Testing wires when installing a new radio	999013
Why use an OEM snap on wire harness	999008
Wiring your new radio using a wire harness	999009
Wire splicing: soldering vs. crimping	999004

**Wiring Instructions:**


The power and speaker wires needed to connect the new radio are attached to the connector of the wire harness located inside the vehicles dash. The Install Doctor **STRONGLY** recommends using an optional snap on wire harness that is specifically designed to snap into the vehicles dash wire harness connector. This will keep you from cutting the vehicles wires. This optional snap on wire harness will have wires on the opposite side of the connector that will allow you to splice these wires to the new radios wires. The only other option is to cut off the vehicles dash wire harness connector and splice the new radios wires directly to these wires. The optional snap on wire harness takes all the guess work out of trying to figure out what each wire is in the vehicles dash wire harness. The optional snap on wire harness shows you what each wire is.

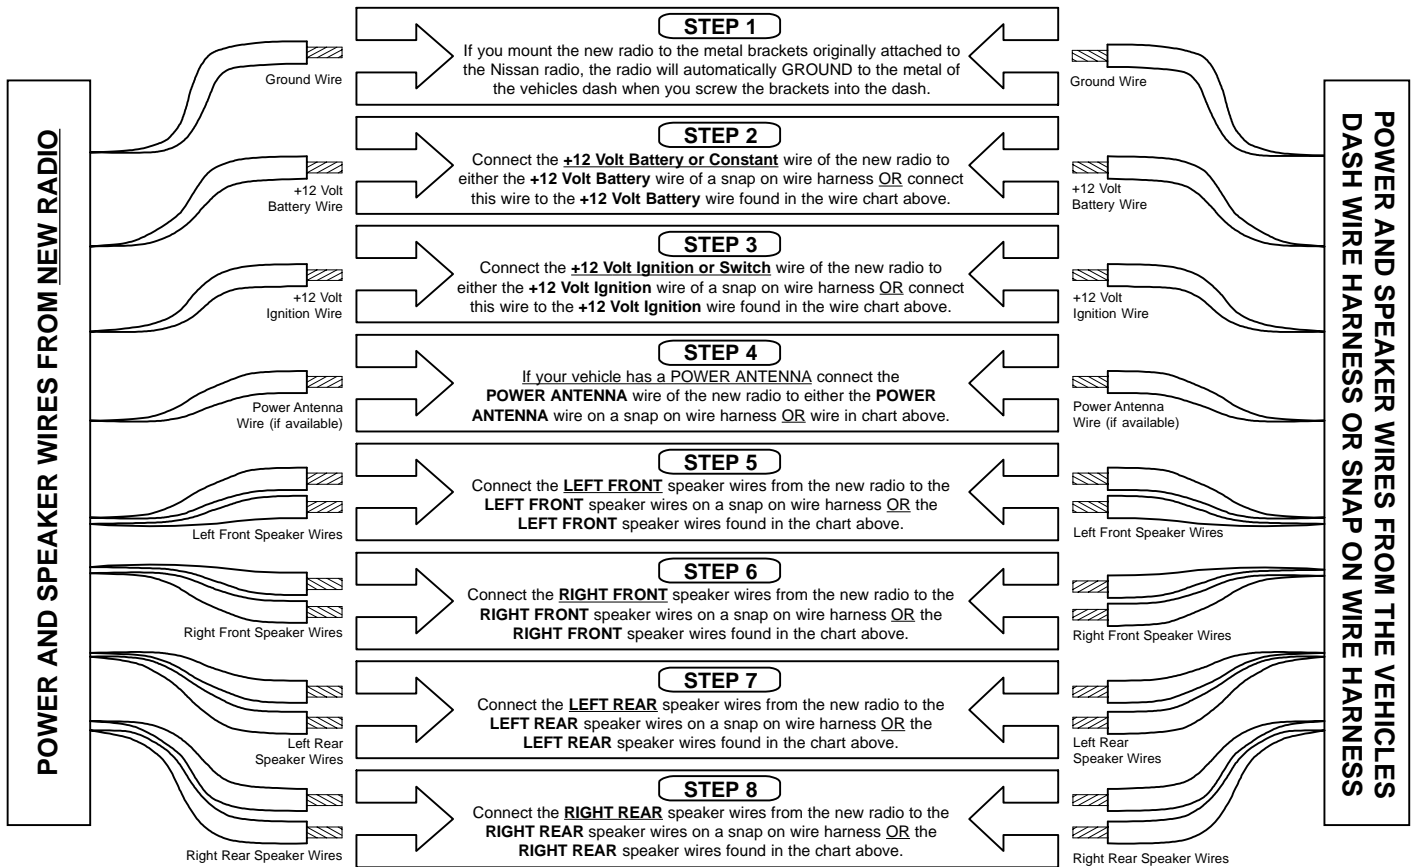

Publication, Duplication, or Retransmission Of This Document Not Expressly Authorized In Writing By The Install Doctor Is Prohibited. Protected By U.S. Copyright Laws. © 1997,1998,1999,2000.

▶ Radio Wire & Color Code Information

Factory in-dash wire harness (this vehicle has a 2 pc harness) that snaps into the factory radio

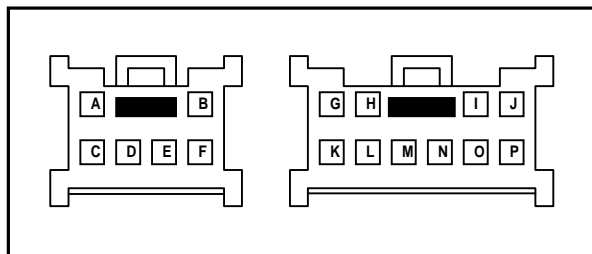

AS VIEWED FROM MATING END OF CONNECTOR


Pin	What It Is	Typical Nissan In Dash Wire Color	Typical New Radio Equivalent Wire Color
A	Right Rear Speaker (+)	Orange	Purple
B	Amplifier Turn On Wire		Blue or Blue w/ White
C	Right Rear Speaker (-)	Black w/ Pink Stripe	Purple w/ Black Stripe
D	Left Rear Speaker (+)	Lite Green	Green
E	Left Rear Speaker (-)	Black w/ Yellow Stripe	Green w/ Black Stripe
F	Amp Ground Wire	connect this wire to the radios ground wire	
G	+12 Volt Ignition Wire	Green w/ Red Stripe	Red
H		<b>Do Not Use</b>	
I	Right Front Speaker (+)	Brown	Gray
J	Left Front Speaker (+)	Blue	White
K	Ground Wire (if available)	metal brackets on radio	Black
L		<b>Do Not Use</b>	
M	+12 Volt Battery Wire	Red w/ Yellow Stripe	Yellow
N	Power Antenna Wire		Blue
O	Right Front Speaker (-)	Black w/ Red Stripe	Gray w/ Black Stripe
P	Left Front Speaker (-)	Black w/ White Stripe	White w/ Black Stripe

**Note:** using an optional snap on wire harness adapter will simplify the wiring. Most snap on wire harness adapters have already converted and color coded the wires from the auto makers in dash wire harness to match typical aftermarket radio wire colors.

\*\* The wire colors listed in the chart above are typical for this vehicle manufacturer during these years but may not be the exact colors for this vehicle. This is another reason to use a snap on wire harness adapter. \*\*

Publication, Duplication, or Retransmission Of This Document Not Expressly Authorized In Writing By The Install Doctor Is Prohibited. Protected By U.S. Copyright Laws. © 1997,1998,1999,2000.

## ▶ Mounting A Radio



### NOTE:


**Before you begin:** The best method to mount a new radio in this vehicle is to unscrew the auto makers factory radio from the brackets attached to the radio and screw the new radio into these brackets just as the factory radio was. This keeps the vehicle looking as stock from the factory as possible and means that you do not have to purchase an installation kit to mount the radio.

This method is called “ISO” mounting a radio. “ISO” mounting a radio has become a very common installation method for mounting new replacement radios. In order to “ISO” mount your radio, three things must exist:

- 1) The radio must be a ‘DIN’ style rectangular radio
- 2) The ‘DIN’ radio must have mounting holes predrilled into both sides of the radio to allow the radio to be secured with screws to the brackets originally attached to the factory radio.
- 3) The radio must have a removable trim ring surrounding the face of the radio

All information needed to complete an ‘ISO’ mounting of the new radio to the brackets originally attached to the factory radio is included on this page. If you are installing a “shafted” style radio or you will be using an installation kit to mount your new radio instead of the ‘ISO’ mounting method, you can find additional help in the following tech documents:


Document Title	Document #
Why use radio installation kits	999005
Mounting your radio to an installation kit	999007
Radio security	999010



Auto makers original radio with attached pocket below the radio


1 Remove the auto makers factory radio/pocket assembly from the vehicle. Remove the phillips screws securing the radio to the brackets which are also attached to the sides of the pocket below the radio.

**Removal Tip:** If your radio has hard to remove screws, insert the tip of the phillips screwdriver into each screw and firmly tap with a hammer to loosen the tension bond between the screws and the metal chassis of the auto makers factory radio. Then attempt to unscrew the screws.




2 Remove the auto makers factory radio, but leave the brackets attached to the pocket.

**What if you do not have a pocket?** If the radio in your vehicle was a Double ‘DIN’ radio (or it did NOT have the pocket below the factory radio) **The Install Doctor STRONGLY recommends that you convert your radio assembly over to use a pocket below the radio.** You can purchase the pocket from a Nissan dealership or you can purchase a “multi” pocket radio installation kit that is designed to fit bracket-pocket applications such as this application. Once you have the pocket, secure the pocket to the metal brackets and you can avoid using radio installation kits to mount the new radio to the dash.




New radios removable trim ring surrounds the face of the radio




On the side of the new ‘DIN’ radio should be pre-drilled holes to allow you to screw the new radio into the brackets. Most car radio manufacturers design their radios with many holes on the side of the radio so the radio can be mounted to many different kinds of bracket/pocket configurations.

If you are going to mount your radio in this manner, you will probably have to remove the radios face trim ring around the face of the radio. This trim ring will most likely prevent the vehicles dash panel from securing properly back onto the dash.



New radio attached to the auto makers pocket and brackets



Line up like this

A common **mistake** when mounting your new radio to the auto makers radio bracket and pocket is selecting the wrong holes on the side of the new radio.

The new radio body, **NOT THE FACE PLATE**, should line up with the pocket below the radio. Most new radio manufacturers design their radios with a face that protrudes out from the body of the radio. The most common mistake is to mount the new radio with the protruded face lined up level with the pocket below the radio, not the new radios body.