

# Camaro (Without BOSE)

General Motors

Radio Replacement

Document #: 460057

1999

thru 2000

Click on a link  
tab to jump to  
that page

Cover  
Page

Before  
You Begin

Remove  
& Install

Wire  
New Radio

Mount  
New Radio

Publication, Duplication, or Retransmission Of This Document Not Expressly Authorized In Writing By The Install Doctor Is Prohibited. Protected By U.S. Copyright Laws. © 1997,1998,1999,2000.

## Factory Radio



## New Radio

and dash installation kit



## Other Documents Available For This Vehicle:

No documents available at this time

## Adobe Acrobat Reader Printing Tips:

- 1) Select **"FILE"** then **"PRINT"** and select your printer.
- 2) In the print options box do the following:
  - A) Locate check box **"Shrink to Fit"**. Place check in box.
  - B) Locate box **"Print Quality"**. Select highest print dpi allowed by printer.
  - C) If print quality listed is not as high as that printers normal quality, press the **"SETUP.."** button. In the next screen, press the **"PROPERTIES"** button and set the printers print quality to the highest print dpi allowed.

## Document Revision History

02/2000 Document Creation

# Camaro (Without BOSE)

General Motors

Radio Replacement

Document #: 460057

1999

thru 2000

Click on a link  
tab to jump to  
that page

Cover  
Page

Before  
You Begin

Remove  
& Install

Wire  
New Radio

Mount  
New Radio

Publication, Duplication, or Retransmission Of This Document Not Expressly Authorized In Writing By The Install Doctor Is Prohibited. Protected By U.S. Copyright Laws. © 1997,1998,1999,2000.

## Overview Of This Radio Install

Step	What Section To Go To
Remove old radio from dash	Remove & Install
Wire the new radio	Wire New Radio
Mount the new radio	Mount New Radio
Finishing the installation	Remove & Install


## Parts Needed For This Radio Install

Parts REQUIRED for the install	Description
Dash installation kit	Multi purpose General Motors
Snap on wire harness adapter	GM 1989 and newer
Antenna Adapter	GM 1989 and newer




### Optional parts for this install

None

## Tools Needed To Complete This Install



Hand tools needed  
to remove radio



Accessory tools needed to test and  
wire the new radio

### ! TOOL TIPS:

**Small Battery:** use a battery to test speaker wires. Touching the (+) positive and (-) negative battery leads to a pair of speaker will cause the speaker to make a "Pop" sound indicating that pair of wires goes to that speaker.

**Voltage Meter:** Always check +12 Volt power wires for voltage before making wire connections. These wires will fluctuate between 10 and 14 Volts.

**Solder Iron or Crimp Tool:** make wire to wire connections using either a solder iron and electrical tape, OR plastic crimp terminals found at most hardware or auto parts stores.

**PLUS: Wire ties or electrical tape:** to neatly bundle and organize your wires for a professional appearance.

## Installation Difficulty Ratings

**Easy.** No advanced skills or specialty tools needed.

**Basics.** Simple tools required. Installs quickly.

**Intermediate.** Requires knowledge of tools, or disassembly of panels.

**Advanced.** Requires advanced tools, or extra time.

**Difficult.** Involves modifying or cutting of the installation area. Advanced tools and/or skills required. Best if performed by experienced installers.

### Do It Yourselfers

Basics

### Professional Installer

Basics

## Support Information If You Need Help

Supplemental information if you need help

Document Title	Document #
Basic DC electronics for automotive applications	999001
Wire splicing: soldering vs. crimping	999004
Why use radio installation kits	999005
Mounting your radio to an installation kit	999007
Why use an optional snap on wire harness	999008
Wiring your new radio using a wire harness	999009
Testing wires when installing a new radio	999013

# Camaro (Without BOSE)

General Motors

Radio Replacement

Document #: 460057

1999

thru 2000

Click on a link  
tab to jump to  
that page

Cover  
Page

Before  
You Begin

Remove  
& Install

Wire  
New Radio

Mount  
New Radio

Publication, Duplication, or Retransmission Of This Document Not Expressly Authorized In Writing By The Install Doctor Is Prohibited. Protected By U.S. Copyright Laws. © 1997,1998,1999,2000.

## ► Remove Factory Radio



### STEP 1:

The plastic dash panel surrounding the radio and air conditioner controls/vents simply unsnaps from the main dash assembly.

Grab the top of the dash near the air conditioner vents and pull firmly until the top of the plastic dash panel separates from the main dash.



### STEP 2:

Once the plastic dash panel has been removed, the bolt screws securing the radio become visible. Locate and remove two (2) 7mm bolt screws that secure the radio.

Pull the radio out of the dash. Unplug the black cable plugged into the rear of the radio. Unplug the plastic wire harness connector snapped into the rear of the radio.

Click on a link  
tab to jump to  
that page

Cover  
Page

Before  
You Begin

Remove  
& Install

Wire  
New Radio


Mount  
New Radio

Publication, Duplication, or Retransmission Of This Document Not Expressly Authorized In Writing By The Install Doctor Is Prohibited. Protected By U.S. Copyright Laws. © 1997,1998,1999,2000.


## ► Wiring The New Radio

Move to: **Wire New Radio** Section


General Motors vehicles manufactured after 1989 have a smaller antenna connector than standard antenna cables. When you install a new radio, this smaller GM antenna cable will not fit properly into the antenna plug on the new radio. You will need an adapter called a **GM antenna adapter** to convert this smaller sized GM antenna cable over to the standard size antenna needed for the new radio.

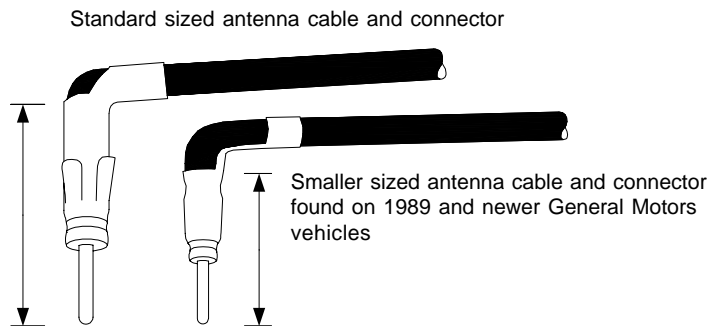

Single 'DIN' and "Shafted" style radios require the use of a radio installation kit to mount the radio.

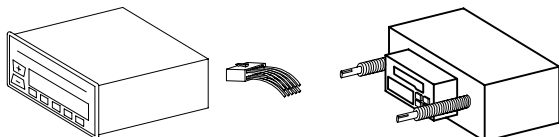

1-1/2 'DIN' style radios are designed to install into GM vehicles without the use of a kit.



## ► Mounting The Radio To A Kit

Move to: **Mounting New Radio** Section

**Installation Note:** GM radios are shorter in depth than the new replacement radio being installed into this vehicle. Located behind the radio is a plastic ledge that the GM radio rests on when the GM radio is installed. This ledge will prevent the new radio from being installed completely into the dash opening.

The maximum depth from the ledge behind the radio to the front of the radio opening is 5-5/8 inches. Most replacement radios are at least 6 inches in depth.

To install a new replacement radio into this vehicle requires a radio installation kit which is designed to extend the front face of the radio installation kit through the opening of the plastic dash panel surrounding the radio.

This is shown in detail in the **"Mounting New Radio"** section.



There is also a specialty kit available (shown above) at most installation shops which is designed for newer GM vehicles that have the bracket and screw hole locations as shown in the photo above. However, this kit is flat and does not extend out to allow for the difference in depth needed for this particular vehicle. **In this situation, you can break away or cut the plastic mounting ledge behind the radio to give the new radio enough depth to properly mount this flat style GM kit.**

# Camaro (Without BOSE)

General Motors

Radio Replacement

Document #: 460057

1999

thru 2000

Click on a link  
tab to jump to  
that page

Cover  
Page

Before  
You Begin

Remove  
& Install

Wire  
New Radio

Mount  
New Radio

Publication, Duplication, or Retransmission Of This Document Not Expressly Authorized In Writing By The Install Doctor Is Prohibited. Protected By U.S. Copyright Laws. © 1997,1998,1999,2000.

## ▶ Completing The Radio Installation



### STEP 1:

Follow the instruction in the "Mount New Radio" section to secure the new radio to an in-dash radio installation kit.

Plug the antenna cable into the rear of the new radio. Make sure all wire connections for the new radio have been completed and plug in any connectors into the rear of the new radio.

Mount the kit/radio assembly into the dash and secure it to the dash.



### STEP 2:

Reattach the plastic dash panel surrounding the radio.

**The installation is now complete.**



# Camaro (Without BOSE)

General Motors

Radio Replacement

Document #: 460057

1999

thru 2000

Click on a link  
tab to jump to  
that page

Cover  
Page

Before  
You Begin

Remove  
& Install

Wire  
New Radio



Mount  
New Radio

Publication, Duplication, or Retransmission Of This Document Not Expressly Authorized In Writing By The Install Doctor Is Prohibited. Protected By U.S. Copyright Laws. © 1997,1998,1999,2000.


## Step By Step Wiring

Page 1 of 2

Auto Makers  
Factory  
Radio



Wire Harness Inside Vehicles  
Dash Which Plugs Into The  
Rear Of The Factory Radio

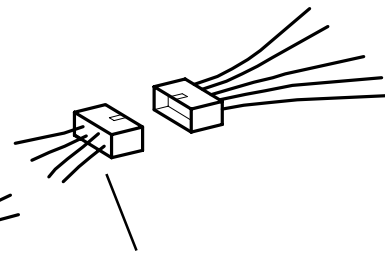

Optional (STRONGLY  
RECOMMENDED) Snap On Wire  
Harness That Splices Into The  
Wires Of The New Radio


(Note: the radio shown is for display purposes and may not be similar in size or dimensions than the auto makers factory radio in your vehicle)

Supplemental information if you need help

Document Title	Document #
Testing wires when installing a new radio	999013
Why use an OEM snap on wire harness	999008
Wiring your new radio using a wire harness	999009
Wire splicing: soldering vs. crimping	999004

## Wiring Instructions:

The power and speaker wires needed to connect the new radio are attached to the connector of the wire harness located inside the vehicles dash. The Install Doctor **STRONGLY** recommends using an optional snap on wire harness that is specifically designed to snap into the vehicles dash wire harness connector. This will keep you from cutting the vehicles wires. This optional snap on wire harness will have wires on the opposite side of the connector that will allow you to splice these wires to the new radios wires. The only other option is to cut off the vehicles dash wire harness connector and splice the new radios wires directly to these wires. The optional snap on wire harness takes all the guess work out of trying to figure out what each wire is in the vehicles dash wire harness. The optional snap on wire harness shows you what each wire is.

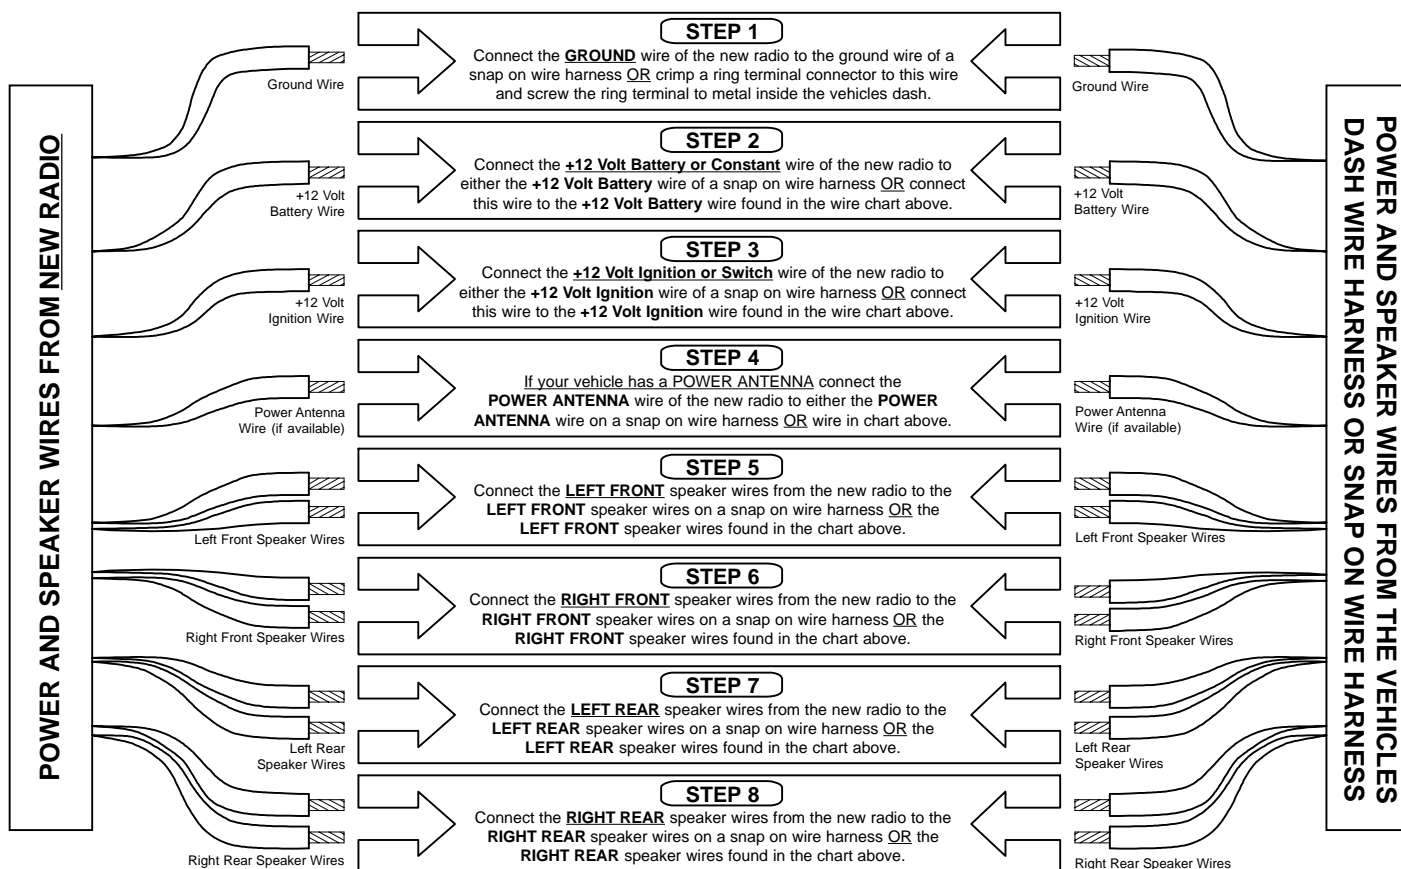

# Camaro (Without BOSE)

General Motors

Radio Replacement

Document #: 460057

1999

thru 2000

Click on a link  
tab to jump to  
that page

Cover  
Page

Before  
You Begin

Remove  
& Install

Wire  
New Radio


Mount  
New Radio

Publication, Duplication, or Retransmission Of This Document Not Expressly Authorized In Writing By The Install Doctor Is Prohibited. Protected By U.S. Copyright Laws. © 1997,1998,1999,2000.

## ▶ Radio Wire & Color Code Information

Page 2 of 2

Factory in-dash wire harness that snaps into the factory radio

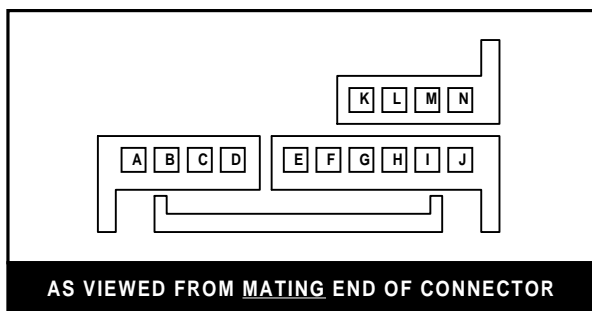

Pin	What It Is	Typical GM Factory In Dash Wire Color	Typical New Radio Equivalent Wire Color
A	Left Front Spkr (-)	Light Gray	White w/ Black Stripe
B	Left Front Spkr (+)	Tan	White
C	Right Front Spkr (-)	Light Green	Gray w/ Black Stripe
D	Right Front Spkr (+)	Dark Green	Gray
E	Ground Wire	Black	Black
F	Not Used		
G	Headlight Dimmer Wire	Gray	Orange (if available)
H	Power Antenna Turn On	Pink (if available)	Blue
I	+12 Volt Ignition Wire	Yellow	Red
J	+12 Volt Battery Wire	Orange	Yellow
K	Right Rear Spkr (-)	Light Blue	Purple w/ Black Stripe
L	Right Rear Spkr (+)	Dark Blue	Purple
M	Left Rear Spkr (-)	Yellow	Green w/ Black Stripe
N	Left Rear Spkr (+)	Brown	Green

# Camaro (Without BOSE)

General Motors

Radio Replacement

Document #: 460057

1999

thru 2000

Click on a link  
tab to jump to  
that page

Cover  
Page

Before  
You Begin


Remove  
& Install

Wire  
New Radio

Mount  
New Radio

Publication, Duplication, or Retransmission Of This Document Not Expressly Authorized In Writing By The Install Doctor Is Prohibited. Protected By U.S. Copyright Laws. © 1997,1998,1999,2000.

## ▶ Mounting A Radio To A Dash Kit



### NOTE:

**Before you begin:** The radio installation kit needed for this vehicle is shown below in pictorial form. There are many manufacturers of General Motors dash installation kits available. Each manufacturer produces slightly different variations of the same kit. But for our purposes, there are (2) two different styles of kits for all General Motors vehicles. Why two styles? The reason is that General Motors uses an abnormal size radio in their vehicles. New replacement radios are thinner but deeper, whereas General Motors radios are taller but less deep. This causes a problem with installing the new replacement radio. The new radio might be too deep to fit in the dash. Thus, kit manufacturers produce kits for General Motors vehicles that extend the front face out of the dash to allow new radios to fit. One style is a one piece design where the extension depth is not adjustable. The second style allows the installer to adjust the depth by using snaps built into the kit. The Install Doctor recommends a one piece design for many reasons.



All information needed to complete the mounting of the new radio to the installation kit is included on this sheet. If you need additional help, please consult the following tech documents:

Document Title	Document #
Why use radio installation kits	999005
Mounting your radio to an installation kit	999007
Radio security	999010

**For best results, use the brackets that were attached to the sides of the General Motors radio by mounting them onto the installation kit.**

General Motors installation dash kit for 'DIN' (rectangular body style) radios

Unbolt the mounting bracket from the sides of the General Motors radio. The new installation kit should be packaged with (4) nuts and bolts. Use these nuts and bolts to secure the brackets from the General Motors radio to the installation kit. This kit is designed to mount the bracket to the kit. The manufacturers of these kits have pre-drilled holes into the kits to allow direct mounting of these brackets. Make sure to align the bracket the same as it was mounted to the General Motors radio. To orient the kit properly, we need to find which side of the kit is the top and which side is the bottom. Look at the sides of the kit. Notice two screw holes. Notice one hole is bigger than the other. The proper positioning of the kit requires that the larger hole be BELOW the center of the kit. See drawing to right.



General Motors installation dash kit for shafted style radios



## What you need to mount your radio

### 'DIN' Radios (Rectangular Body Style)

Slide the radios installation sleeve into the mounting kit. (some sleeves may be marked with "TOP" to note the top of the sleeve)

Bend  
Tabs

New radios  
installation sleeve

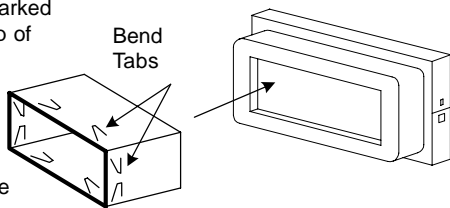

New Radio


Once the radios installation sleeve is completely slid into the kit, bend out the tabs on the installation sleeve behind the rear surface of the installation kit. The radios installation sleeve is secured to the installation kit by "sandwiching" the installation kit between the front lip and the bent tabs of the radios installation sleeve.

**Radio slides into sleeve after sleeve is mounted to the installation kit**

### Shafted Radios

New Radios  
Face Plate

past  
kit. You  
remove the

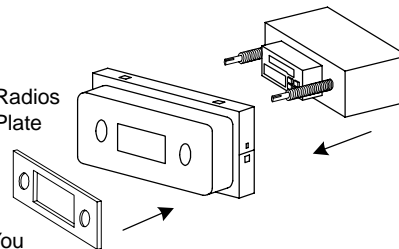

Slide the radio through the backside of the installation kit. Slide the radios front face plate onto the front surface of the installation kit. Notice how much of the radios shafts are protruding the front of the will need to excess by

adjusting the depth of the new radios shaft spin nuts. Pull the radio out of the installation kit and spin on the nuts that are included with the radio. Slide the radio back into the installation kit. Adjust the nuts by spinning them forward or back to adjust the depth that the new radios shafts protrude out the front of the kit. To assure a "flush" and professional appearance, make sure that the new radios front face plate is flush with the new radios display box that is visible through the opening of the installation kit. Complete the installation by securing the front face plate with the remaining nuts provided with the new radio. The new radio is secured to the installation kit by "sandwiching" the installation kit between the new radios front face plate and the nuts spun onto the shafts of the radio behind the installation kit.



### CAUTION:

Do not overtighten the spin nuts securing the front face plate. Tighten to secure the radio without cracking the plastic.



### TIP:

If your radio manufacturer provides 6 spin nuts, use 4 to secure the radio to the installation kit and 2 to secure the front face plate.